


DJM320240G05(640(RGB)X480 DOTS TFT LCD)

1. DIMENSION OUTLINE

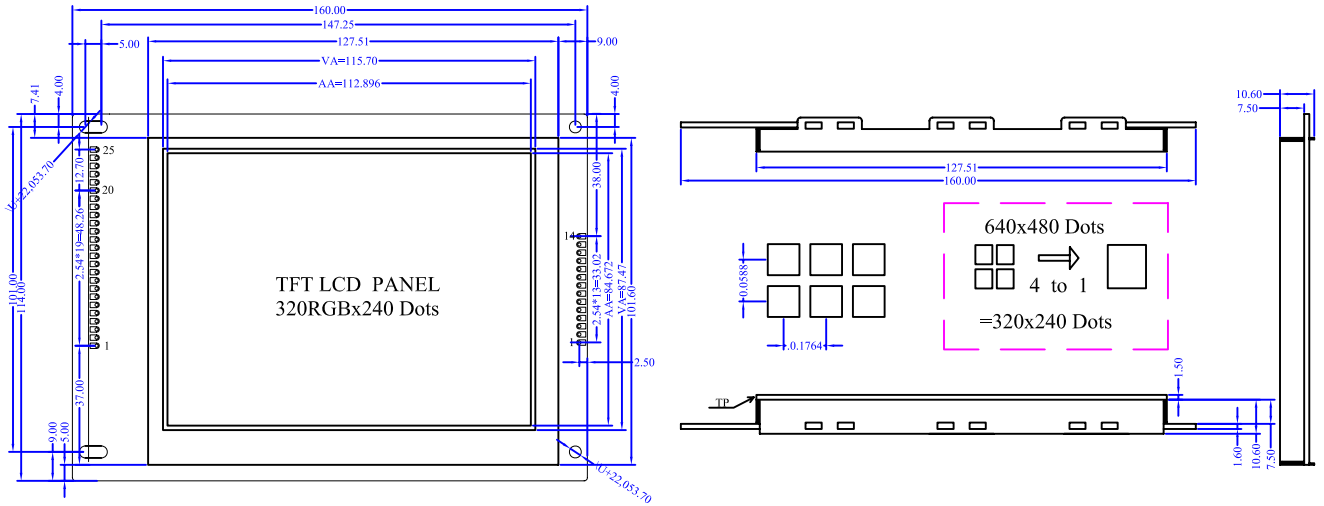


2. MECHANICAL SPECIFICATIONS

ITEM	SPECIFICATIONS	ITEM	REMARK
Module Size(L×W×H)	160.0×114.0×11.0	mm	Reference Dimensional Outline
View Area(W×H)	112.896×84.672	mm	
Effective V/Area	115.70×87.47	mm	
Number of Characters	320×240	-	
Dot Pitch(W×H)	0.12×0.36	mm	
Dot Size(W×H)	0.0588×0.1764	mm	

3. ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	CONDITION	STANDARD	
			MIN	MAX
Logic Voltage	V _{DD}	Ta=25°C	-0.3V	7V
Input Voltage	V _I		-0.3V	V _{DD} +0.3V
Operation Temperature	T _{OP}	—	-20°C	70°C
Storage Temperature	T _{St}	—	-30°C	80°C

4. BLOCK DIAGRAM MECHANICAL

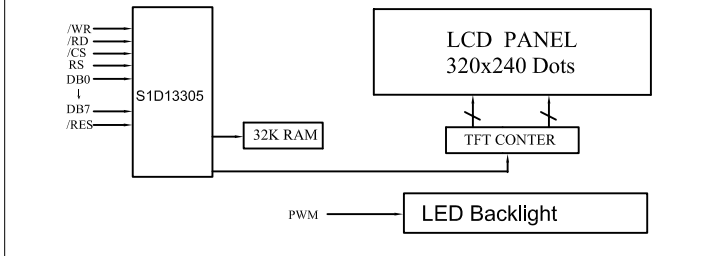

6. INTERFACE PIN CONNECTIONS

ITEM(J1)	SYMBOL	LEVEL	FUNCTIONS
J1			
1	GND	0V	Power Ground
2	VCC	+5V	Power supply for logic
3	NC	—	NC
4	/WR	L	Write signal
5	/RD	L	Read signal
6	/CS	L	Chip enable signal
7	RS	H/L	H:command L:data
8	/REST	L	Reset signal
9-16	DB0-DB7	H/L	Data Bus
17,19	PWM	+5V	Backlight Anode
18	NC	—	NC
19	PWM	+5V	Power supply for LED Backlight
20	NC	—	NC
21	DCLK	H/L	Data Clock Signal (ADS7843)
22	DOUT	H/L	Data Output (ADS7843)
23	DIN	H/L	Data input (ADS7843)
24	T_CS	H/L	Touch Panel Select (ADS7843)
25	PEN	H/L	INT Signal (ADS7843)

5. LED BACKLIGHT SPECIFICATIONS

ITEM	SYMBOL	TYPE	MAX	UNIT
Ta=25°C				
Forward Voltage	V _f	3.0	3.1	V
Forward Current	I _f	550	—	mA
Emission Wave Length	λ _p	White	—	nm

7. ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	MIN	TYPE	MAX	UNIT
Ta=25°C					
Logic Power	V _{DD}	4.5	5	5.5	V
Input High Voltage	V _{IH}	V _{DD} -2.2	—	V _{DD}	V
Input Low Voltage	V _{IL}	0	—	0.8	V
Output High Voltage	V _{OH}	V _{DD} -0.3	—	V _{DD}	V
Output Low Voltage	V _{OL}	0	—	0.3	V
Logic Current	I _{DD}	—	—	100	mA
Operation Voltage For LCD	V _{DD-V0}	—	23	—	V

ITEM (J2/13/14)	SYMBOL	LEVEL	FUNCTIONS (external Controller)
1-4	D0-D3	H/L	Display Data Bus
5	DIS.O	H/L	Display ON/OFF
6	FLM	H/L	Scan Start Line
7	NC	—	NC
8	LP	H/L	Data Latch Clock
9	CP	H/L	Data Shift Clock
10	VDD	+5V	Power supply for logic
11	VSS	0V	Power Ground
12	NC	—	NC
13	NC	—	NC
14	FG	—	Frame Ground