


客户确认:

客户代码: WSJ24F67G01

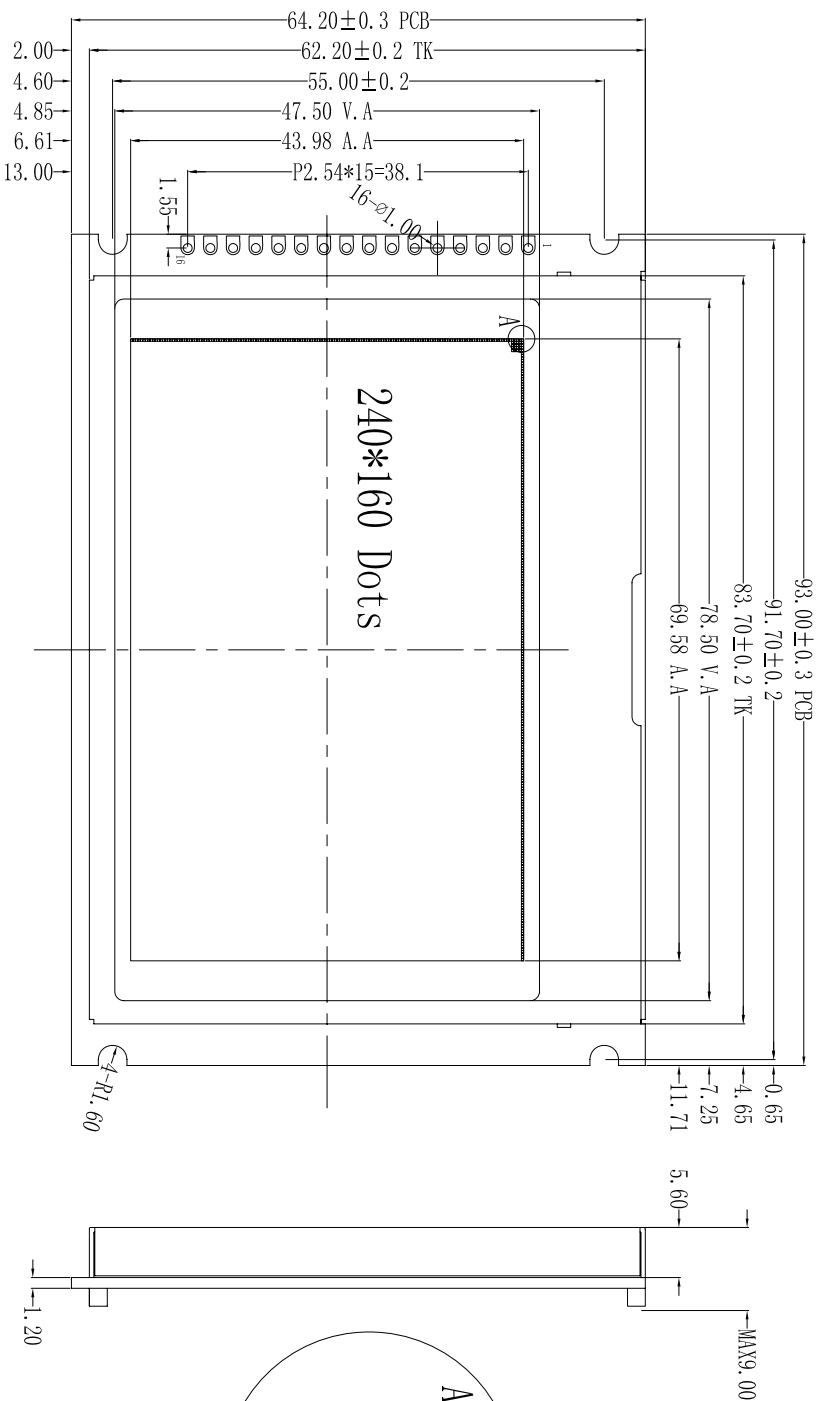

DETAIL: A
SCALE: 10:1

NOTES:

1. 显示类型: FSTN
2. 视角: 6: 00
3. 显示模式: 半透/正显/防UV
4. 驱动IC: ST7586S
5. VDD电压: 3.3V, 背光电压3.3V
6. VOP电压: 16.0V
7. 占空比: 1/160 DUTY, 1/12 BIAS
8. 工作温度: -20~+80 °C
9. 存储温度: -30~+80 °C
10. 所有未标注公差默认认为: ±0.2mm

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
DEC.	VDD	VSS	/CS	RS	/NR	RD	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	RST	BIA

REV 1.0

深圳市大帝金茂实业有限公司

DRAWN BY: GQT
CHECKED BY: LZH
LCD NO: DJM240160G01

APPROVED BY: UNTR:

DATE: 2015-10-17

1 OF 1
MM

